



*Engine instrumentation and electrical meters
Custom engineered for bottom line performance*

Senders


SENDERS

Benefits:


Precision Beede senders cover standard ranges and are compatible with our and other manufacturers' engine instruments. A full range of standard NPT sizes are stocked and special sizes are available. All senders carry the standard one year Beede warranty.



Pressure



Temperature

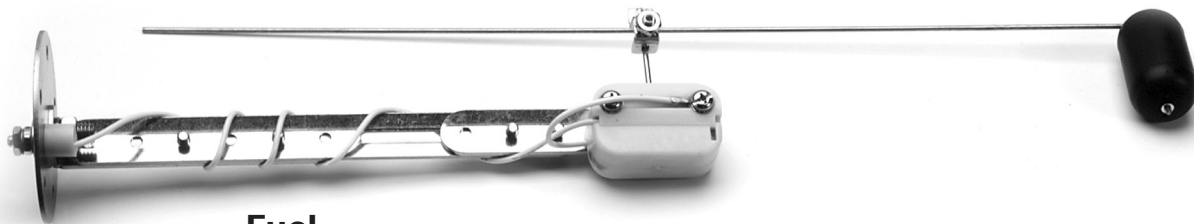

Fuel

*BEEDE ELECTRICAL INSTRUMENT CO., INC. • P.O. BOX 8910 • PENACOOK, NH 03303-8910
TEL: 603-753-6362 • FAX 603-753-6201 • EMAIL: sales@beede.com • WEB SITE: <http://www.beede.com>*



ISO 9001 Certified

CE • Q1 • QUEST • FMC

Specifications for Senders

Type	Description	Size	Part Number
Fuel	6-24" 240-33 ohm	6"-24"	134318
	6-24" 5 Hole Flange	6"-24"	127350
	6-24" 5 Hole 2 Wire 240-33 ohm	6"-24"	134319
	6-24" 5 Hole Flange 0-90 ohm	6"-24"	127348
	6-24" 5 Hole 1 Wire	6"-24"	134689
Oil/Air Pressure	0-40 PSI	1/8 NPT	146153
	0-80 PSI 240-33 ohm	1/8 NPT	127351
	0-80 PSI 0-90 ohm	1/8 NPT	127352
	0-80 PSI Dual 120-16.5 ohm	1/8 NPT	127369
	0-80 PSI 2 Wire	1/8 NPT	140239
	0-80 PSI 73-10 ohm	1/8 NPT	134899
	0-100 PSI 240-33 ohm	1/8 NPT	127353
	0-100 PSI Dual 120-16.5 ohm	1/8 NPT	127370
	0-120 PSI 0-90 ohm	1/8 NPT	127357
	0-125 PSI 240-33 ohm	1/8 NPT	127355
	0-150 PSI 240-33 ohm	1/8 NPT	127437
	0-300 PSI 0-90 ohm	1/8 NPT	127356
	0-400 PSI 0-90 ohm	1/8 NPT	127371
	Water/Oil (temp)	100-280 F S/W compatible	1/8 NPT
100-250 F		1/2 NPT	127347
100-240 F S/W compatible		1/8 NPT	127338
100-240 F S/W compatible		1/4 NPT	127339
100-240 F S/W compatible		3/8 NPT	127340
100-240 F S/W compatible		1/2 NPT	127341
100-240 F Dual S/W compatible		1/4 NPT	127366
100-240 F Dual S/W compatible		3/8 NPT	127367
100-280 F / 140-320 F BEEDE		1/8 NPT	127342
100-280 F / 140-320 F BEEDE		1/4 NPT	127343
100-280 F / 140-320 F BEEDE		3/8 NPT	127345
100-280 F / 140-320 F BEEDE		1/2 NPT	127346
100-280 F Dual BEEDE		1/2 NPT	134967
24V Adaptor			148046
Pitot Kit	Installation kit for WSI without Tubing		146704
Pitot Kit	Installation kit for WSI with Tubing		140075
Generator	Signal Sender 8 Pulse		123039
Mag Sensor	MPU 1.75 L-G w/10-32 HDW		113284
	MPU 3.30 L-G w/10-32 HDW		113285

Senders-0503

BEEDE ELECTRICAL INSTRUMENT CO., INC. • P.O. BOX 8910 • PENACOOK, NH 03303-8910
 TEL: 603-753-6362 • FAX 603-753-6201 • EMAIL: sales@beede.com • WEB SITE: http://www.beede.com

SENDERS